



Modular Cooking Range Line 700XP 2 Hot Plate Electric Infrared Cooking Top Range

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



- | | |
|---------------------|--|
| 371024 (E7IRED2000) | 2-zone (2,2 kW each)
infrared cooking top |
| 371133 (E7IRED200N) | 2-zone (2,2 kW each)
infrared cooking top |

Short Form Specification

Item No. _____

Ceramic glass top cooking surface 6 mm thick, lying flush to the stainless steel frame for smooth pan movement and easier cleaning. Completely sealed infrared cooking top surface to prevent liquid infiltration. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Ceramic glass top cooking surface with 2 infrared heating zones 6 mm thick.
- The circular concentric heating sections measuring 230 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside the unit.
- Warning light to indicate residual surface heat.
- Immediate heat transfer from cooking top to pan.
- Low heat dissipation to the kitchen.
- Energy regulation of each zone.
- Heating via ultra high powered heating elements.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- IPX 4 water protection.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL: _____




Experience the Excellence
www.professional.electrolux.com

700XP 2 Hot Plate Electric Infrared Cooking Top Range
Modular Cooking Range Line

Optional Accessories

- Junction sealing kit PNC 206086
- Support for bridge type installation, 800mm PNC 206137
- Support for bridge type installation, 1000mm PNC 206138
- Support for bridge type installation, 1200mm PNC 206139
- Support for bridge type installation, 1400mm PNC 206140
- Support for bridge type installation, 1600mm PNC 206141
- Support for bridge type installation, 400mm PNC 206154
- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension for 700 line PNC 206291
- Chimney upstand, 400mm PNC 206303
- Right and left side handrails PNC 206307
- Back handrail 800mm, Marine PNC 206308
- Chimney grid net, 400mm (700XP/900) PNC 206400
- Frontal handrail, 400mm PNC 216046
- Frontal handrail, 800mm PNC 216047
- Frontal handrail, 1200mm PNC 216049
- Frontal handrail, 1600mm PNC 216050
- Large handrail - portioning shelf, 400mm PNC 216185
- Large handrail - portioning shelf, 800mm PNC 216186
- 2 side covering panels for top appliances PNC 216277

Modular Cooking Range Line 700XP 2 Hot Plate Electric Infrared Cooking Top Range

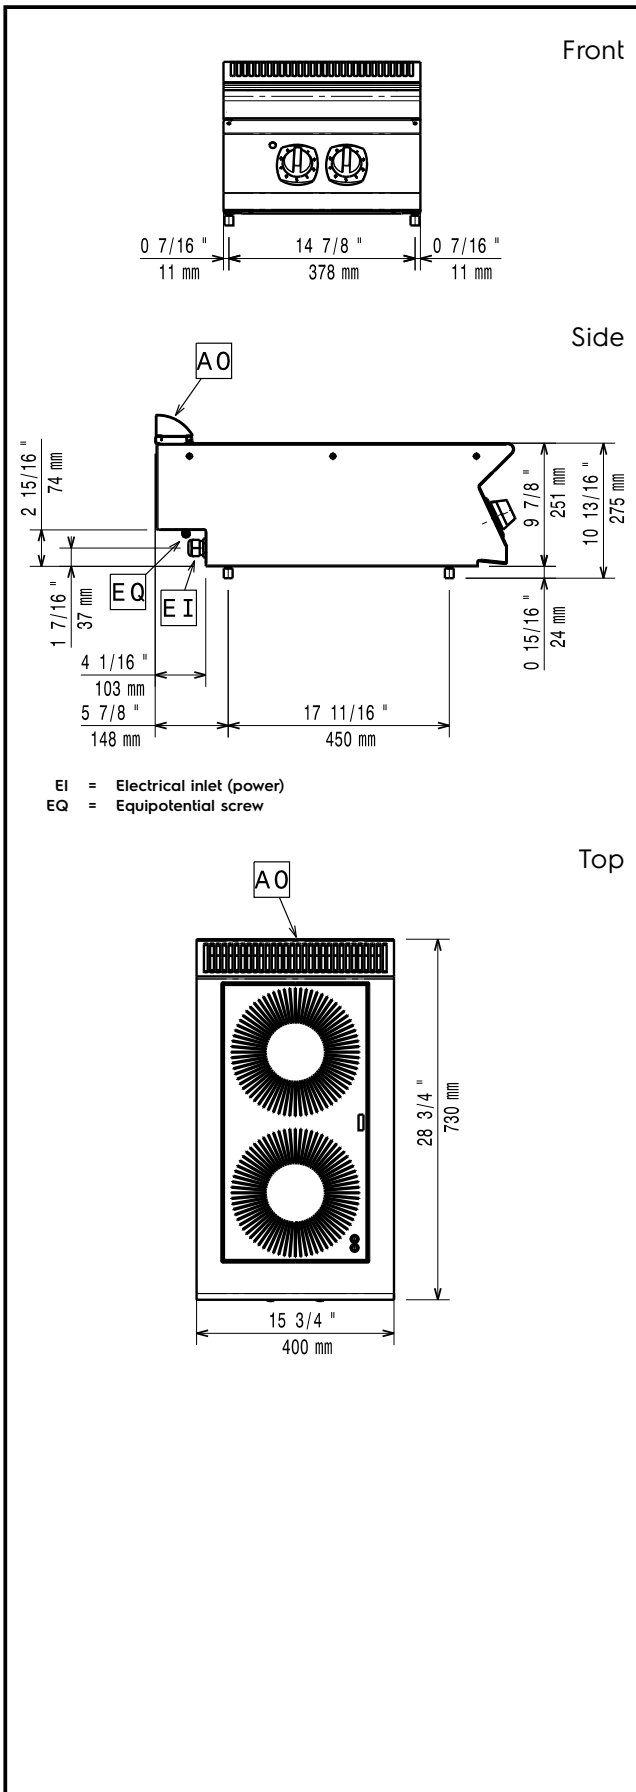

Electric

Supply voltage:	
371024 (E7IRED2000)	380-400 V/3N ph/50/60 Hz
371133 (E7IRED200N)	230 V/3 ph/50/60 Hz
Total Watts:	4.4 kW
Predisposed for:	
371024 (E7IRED2000)	380-400V 3N- 50/60Hz 3,7-4,4kW

Key Information:

Front Plates Power:	2.2 - 0 kW
Back Plates Power:	2.2 - kW
Front Plates dimensions:	Ø 230
Back Plates dimensions:	Ø 230
External dimensions, Width:	400 mm
External dimensions, Height:	250 mm
External dimensions, Depth:	730 mm

Net weight:

371024 (E7IRED2000)	22 kg
371133 (E7IRED200N)	15 kg
Shipping weight:	
371024 (E7IRED2000)	26 kg
371133 (E7IRED200N)	27 kg

Shipping height:

371024 (E7IRED2000)	530 mm
371133 (E7IRED200N)	540 mm

Shipping width:

371024 (E7IRED2000)	460 mm
371133 (E7IRED200N)	500 mm

Shipping depth:

	820 mm
--	--------

Shipping volume:

371024 (E7IRED2000)	0.2 m ³
371133 (E7IRED200N)	0.22 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group:

371024 (E7IRED2000)	N7CIE
371133 (E7IRED200N)	NIR74