Hand held Mixers Speedy Mixer portable mixer 250 W with Stainless Steel Tube

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



600024 (SMT20W25)

Portable mixer 250 W stainless steel tube 200 mm -230 V/1N/50-60

600026 (SMT25W25)

Portable mixer 250 W stainless steel tube 250 mm -230 V/1N/50-60

Short Form Specification

Item No.

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Single speed: 15000 rpm.

Main Features

- Ideal to process small quantities (less than 35
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:
 - -Choice of stainless steel tube: 200 mm or 250 mm, depending on model
 - -Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.

Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Single speed: 15000 rpm.
- Motor protected from overload by a double insulation.

- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

Optional Accessories


 Whisk tool for speedy mixer (variable speed models only) 	PNC 650057 □
• Stainless steel tube for Speedy mixer, 20 cm	PNC 650187 □
• Stainless steel tube for Speedy mixer, 25 cm	PNC 650188 □
Wall support for speedy mixer	PNC 653090 □
 Tube for emulsions for speedy mixer, 25cm 	PNC 653098 □

APPROVAL:





Hand held Mixers Speedy Mixer portable mixer 250 W with Stainless Steel Tube

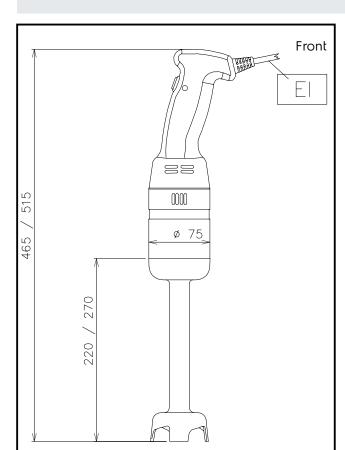

Electric

Supply voltage:

600024 (SMT20W25) 230 V/1N ph/50 Hz **600026 (SMT25W25)** 230 V/1N ph/50 Hz

Electrical power max.: 0.25 kW
Total Watts: 0.25 kW

Key Information:

External dimensions, Width:

110 mm

External dimensions, Height: 600024 (SMT20W25)

470 mm 520 mm

600026 (SMT25W25)
External dimensions, Depth:
Shipping weight:

75 mm 2 kg

El = Electrical inlet (power)







